

LOW VOLTAGE TRANSFORMERS FOR HALOGEN LIGHTING

Hard Wire Low Voltage Transformers

G3



WH-601E5C



WH-1201E6A



WH-601E6A-2



WH-801E5




WH-602E6AF



WH-801E6A-3



WH-2301E6A

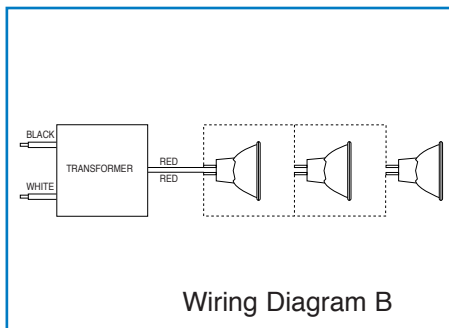

Wiring Diagram B

- Standard case colour is Black
- White is also available, please add suffix "W" to the part number
- WH-801E6A-3 comes with an Aluminium Casing
- Power Factor >95%
- Total Harmonic Distortion <20%

Transformers

MODEL NO.	INPUT VOLTS	OUTPUT VOLTS	MAXIMUM WATTAGE	WIRING DIAGRAM	OUTPUT LEAD LENGTH	DIMENSIONS			APPROVALS	CLASS 2	AUTO RESET	SPECIAL FEATURES
						L	W	H				
ET60-1-F	120V	12V	60	B	6" RED TEW	2.48" (63.0)	1.48" (38.0)	1.06" (27.0)	UR, cUR	•	--	
ET60-2-F	230V	12V	60	B	6" RED TEW	2.48" (63.0)	1.48" (38.0)	1.06" (27.0)	TUV, EMC, CE	•	--	
ET60-1-EMI	120V	12V	60	B	6" RED TEW	2.48" (63.0)	1.48" (38.0)	1.06" (27.0)	UR, cUR	•	--	Complies with FCC
WH-601E5	120V	12V	60	B	6" RED TEW	2.55" (65.0)	1.38" (35.0)	1.02" (26.0)	UL, CSA	•	--	
WH-601E5C	120V	12V	60	B	6" RED TEW	2.55" (65.0)	1.38" (35.0)	1.02" (26.0)	UL, CSA	•	--	With JST Connector
WH-601E6A-2	120V	12V	60	B	6" RED TEW	3.34" (85.0)	1.02" (26.0)	0.67" (22.0)	UL, cUL	•	•	
WH-601E2CA-2	120V	12V	60	B	6" RED TEW	3.34" (85.0)	1.02" (26.0)	0.67" (22.0)	UL, cUL	•	•	With JST Connector
WH-601E6A-3	120V	12V	60	B	6" RED TEW	2.55" (65.0)	1.37" (35.0)	0.79" (20.0)	UL, cUL	•	•	
WH-602E6AF	230V	12V	60	B	--	6.73" (171.0)	1.73" (44.0)	0.63" (16.0)	TUV, EMC, CE	--	•	With Terminal Block
LVT-75B	120V	12V	75	B	6" RED TEW	3.18" (81.0)	1.46" (37.0)	0.86" (22.0)	UR, cUR	•	•	
ET80-1-F	120V	12V	80	B	6" RED TEW	2.48" (63.0)	1.48" (38.0)	1.06" (27.0)	UR, cUR	•	--	
ET80-2-F	230V	12V	80	B	6" RED TEW	2.48" (63.0)	1.48" (38.0)	1.06" (27.0)	TUV, EMC, CE	•	--	
ET80-1-EMI	120V	12V	80	B	6" RED TEW	2.48" (63.0)	1.48" (38.0)	1.06" (27.0)	UR, cUR	•	--	Complies with FCC
WH-801E5	120V	12V	80	B	6" RED TEW	2.55" (65.0)	1.38" (35.0)	1.02" (26.0)	UL, CSA	•	--	
WH-801E5C	120V	12V	80	B	6" RED TEW	2.55" (65.0)	1.38" (35.0)	1.02" (26.0)	UL, CSA	•	--	With JST Connector
WH-801E6A-3	120V	12V	80	B	6" RED TEW	2.09" (53.0)	1.30" (33.0)	0.79" (20.0)	UL, cUL	•	•	Aluminum Casing
WH-1201E6A	120V	12V	105	B	6" RED TEW	4.31" (110.0)	1.81" (46.0)	1.25" (32.0)	UL, cUL	•	•	
WH-1052E-AF	230V	12V	105	B	--	6.37" (162.0)	1.77" (45.0)	1.18" (30.0)	TUV, EMC, CE	--	•	With Terminal Block
WH-1601E6A	120V	12V	150	B	6" RED TEW	4.31" (110.0)	1.81" (46.0)	1.25" (32.0)	UL, cUL	•	•	
WH-1502E-AF	230V	12V	150	B	--	6.37" (162.0)	1.77" (45.0)	1.18" (30.0)	TUV, EMC, CE	--	•	With Terminal Block
WH2301E6A	120V	12V	230	B	6" RED TEW	4.31" (110.0)	1.81" (46.0)	1.25" (32.0)	c UR us	•	•	
WH2501S	120V	12V	250	B	6" RED TEW	4.29" (109.0)	3.54" (90.0)	1.65" (42.0)	c UR us	•	•	